


正

反

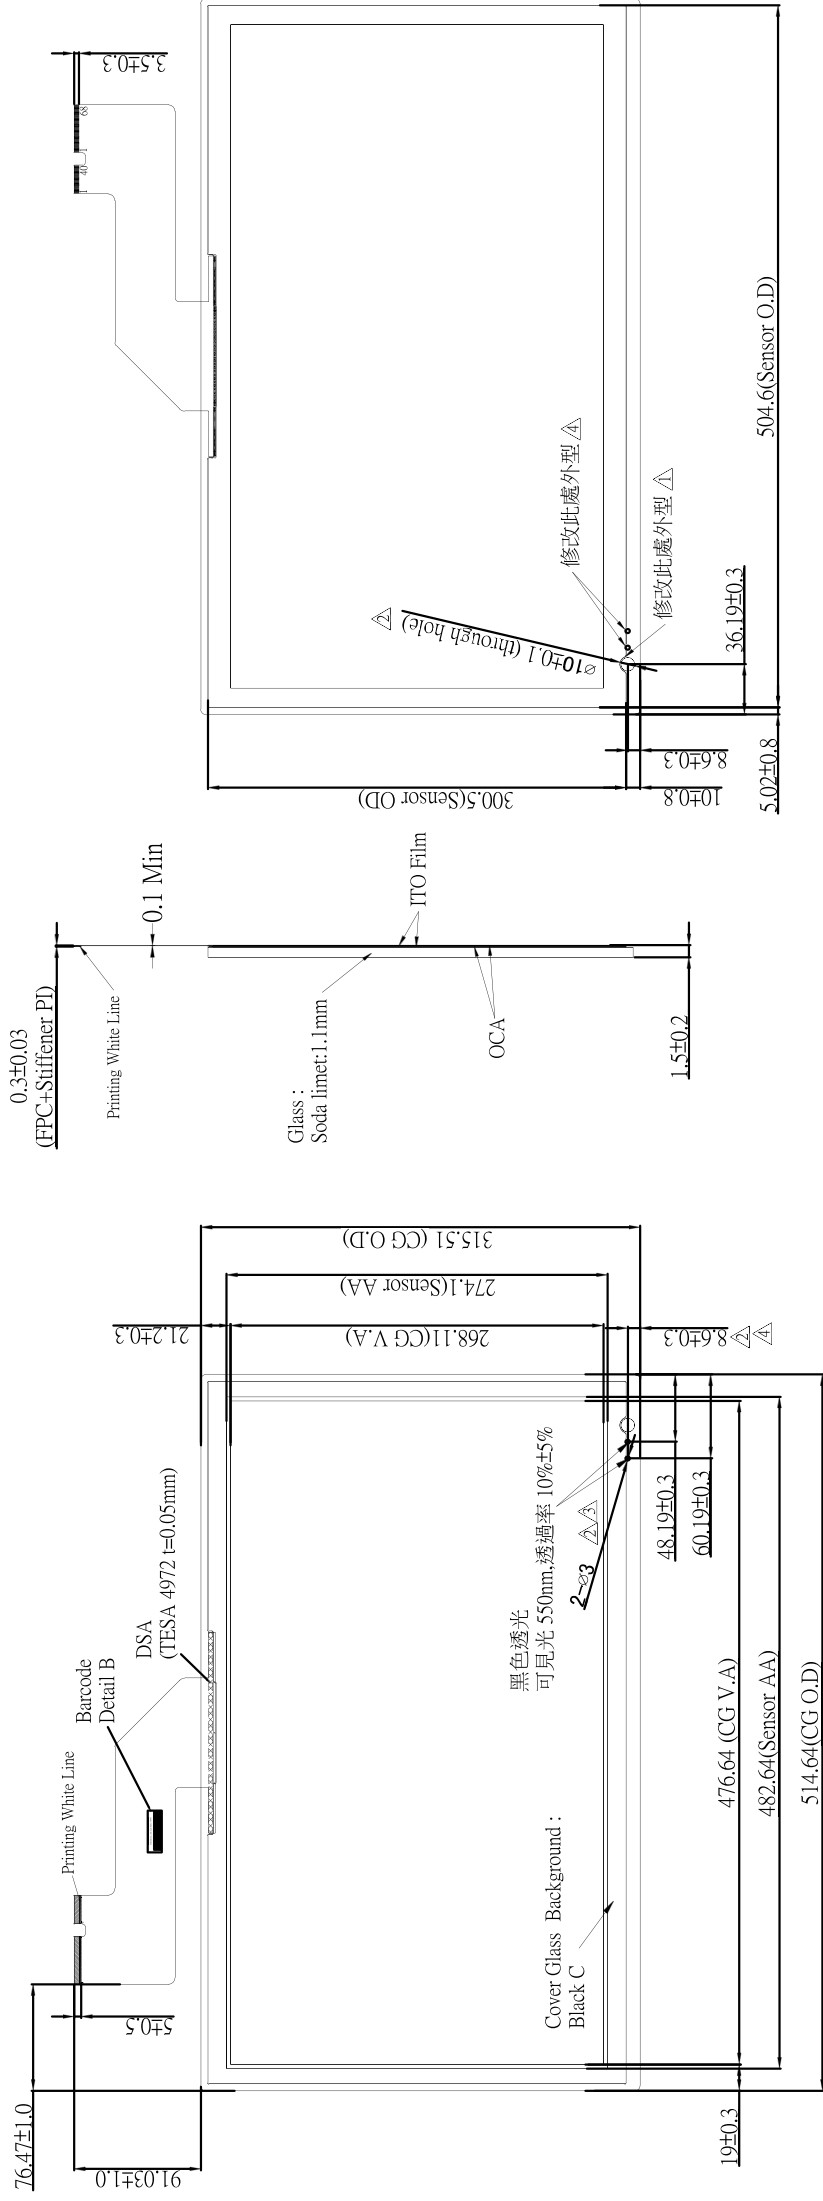

| 68 pin connector | |
|------------------|-----------|
| Pin Number | Pin Name |
| 1 | GND |
| 2 | Shielding |
| 3-66 | X64-X1 |
| 67 | Shielding |
| 68 | GND |

| 40 pin connector | |
|------------------|-----------|
| Pin Number | Pin Name |
| 1 | Shielding |
| 2-37 | Y1-Y36 |
| 38 | Shielding |
| 39-40 | NC |

| TOP | |
|-----------------|----------|
| Material | Quantity |
| 0.0 Cover Glass | (1.1) |
| 1.0 TOP OCA | (0.1) |
| 1.1 TOP_AG | (0.1) |
| 1.2 TOP_ITO | |
| 1.3 TOP_PET | |
| 2.0 MID_OCA | (0.1) |
| 2.1 BOT_AG | (0.1) |
| 2.2 BOT_ITO | |
| 2.3 BOT_PET | |

Total Thickness: 0.4 ± 0.05

BOTTOM

1. 部品材料符合RoHS規定
 2. 部品材料不含鹵素物質